

Perimeter Light Installation Instructions

Lumitec flood lights should be installed by qualified persons only. Establish the electrical connections per ABYC guidelines. Light circuits should be protected with an appropriately sized fuse. Fuses on circuits with multiple lights should be sized accordingly. Lights are protected by an over-temperature circuitry and will not overheat.

For Single Color "LT" Products (2 wires)

Wire lights as directed to any standard SPST "On/Off" switch and fuse properly. Simply turn the light On and Off. No additional instruction needed.

For 2 Color with Dimming Products (2 wires)

Note that the light ramps in intensity over a period of about 3 seconds on startup. To enable a "dimmed mode" simply interrupt the ramp in intensity with a brief off/on toggle of the power. Intensity can be set from a soft glow to full power. A subsequent off/on toggle allows the light to change colors.

For 2 Color - Flashing Products (3 wires)


Wire to any standard 3-way "On/Off/On" switch or 2 separate 2-way "On/Off" switches. The "red" wire controls the white light and can be dimmed using the method described above. The "orange" wire controls the flashing light.

Lumens: 1,000 (cold)
Color Temp: 5000
Color Rendering: 70+
IP67 Compliant
Voltage: 10 - 30vDC
12vDC Amps: 1.30A
24vDC Amps: 600mA

3 Year Limited Warranty

The product is warranted to be free from defects in workmanship and materials for a period of three years from the date of original purchase. Lumitec is not responsible for product failure caused by abuse, neglect, improper installation, or failure in applications other than those for which it was designed, intended, and marketed. Should your Lumitec product prove defective during the warranty period, promptly notify Lumitec and return product with freight prepaid. Lumitec will, at its option, repair or replace the product or defective portion without charge for parts or labor, or, at Lumitec's option, refund purchase price. Products repaired or replaced under this warranty shall be warranted for the unexpired portion of the warranty applying to the original product(s). No warranty or affirmation of fact, express or implied, other than as set forth in the limited warranty statement above is made or authorized by Lumitec, Inc. Any liability for consequential and incidental damages is expressly disclaimed. Lumitec liability in all events is limited to, and shall not exceed, the purchase price paid.

Visit lumiteclighting.com for more details

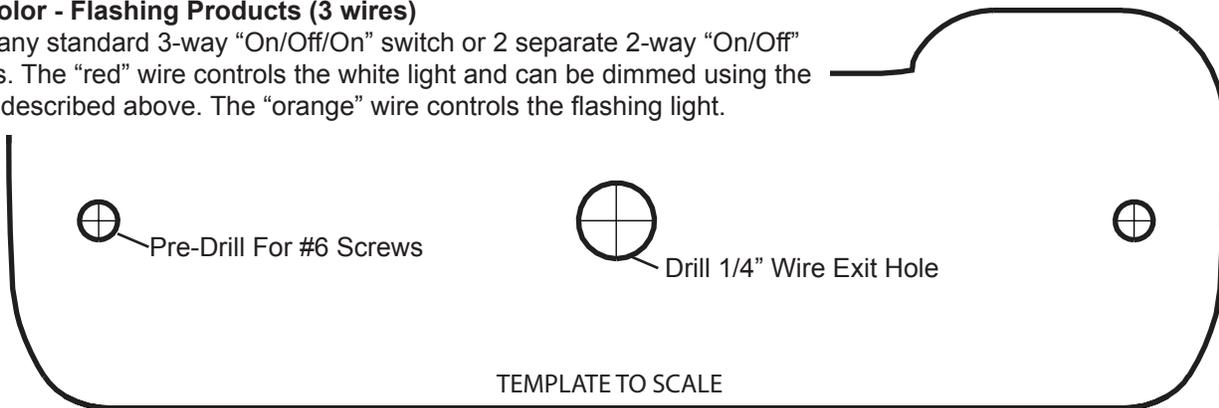

Perimeter Light Installation Instructions

Lumitec flood lights should be installed by qualified persons only. Establish the electrical connections per ABYC guidelines. Light circuits should be protected with an appropriately sized fuse. Fuses on circuits with multiple lights should be sized accordingly. Lights are protected by an over-temperature circuitry and will not overheat.

For Single Color "LT" Products (2 wires)

Wire lights as directed to any standard SPST "On/Off" switch and fuse properly. Simply turn the light On and Off. No additional instruction needed.

For 2 Color with Dimming Products (2 wires)

Note that the light ramps in intensity over a period of about 3 seconds on startup. To enable a "dimmed mode" simply interrupt the ramp in intensity with a brief off/on toggle of the power. Intensity can be set from a soft glow to full power. A subsequent off/on toggle allows the light to change colors.

For 2 Color - Flashing Products (3 wires)

Wire to any standard 3-way "On/Off/On" switch or 2 separate 2-way "On/Off" switches. The "red" wire controls the white light and can be dimmed using the method described above. The "orange" wire controls the flashing light.

Lumens: 1,000 (cold)
Color Temp: 5000
Color Rendering: 70+
IP67 Compliant
Voltage: 10 - 30vDC
12vDC Amps: 1.30A
24vDC Amps: 600mA

3 Year Limited Warranty

The product is warranted to be free from defects in workmanship and materials for a period of three years from the date of original purchase. Lumitec is not responsible for product failure caused by abuse, neglect, improper installation, or failure in applications other than those for which it was designed, intended, and marketed. Should your Lumitec product prove defective during the warranty period, promptly notify Lumitec and return product with freight prepaid. Lumitec will, at its option, repair or replace the product or defective portion without charge for parts or labor, or, at Lumitec's option, refund purchase price. Products repaired or replaced under this warranty shall be warranted for the unexpired portion of the warranty applying to the original product(s). No warranty or affirmation of fact, express or implied, other than as set forth in the limited warranty statement above is made or authorized by Lumitec, Inc. Any liability for consequential and incidental damages is expressly disclaimed. Lumitec liability in all events is limited to, and shall not exceed, the purchase price paid.

Visit lumiteclighting.com for more details

